


Standard
TEAC FD-235HF

Pins

HP35670A
A100 Disk Drive

| | | |
|-----|----|--------------------|
| NC | 1 | DISK CHANGE READY |
| NC | 3 | SIDE ONE SELECT |
| NC | 5 | READ DATA |
| GND | 7 | WRITE PROTECT |
| GND | 9 | TRACK 00 |
| GND | 11 | WRITE GATE |
| GND | 13 | WRITE DATA |
| GND | 15 | STEP |
| GND | 17 | DIRECTION SELECT |
| GND | 19 | MOTOR ON |
| GND | 21 | DRV SEL N |
| GND | 23 | DRIVE SELECT 1 |
| GND | 25 | DRIVE SELECT 0 |
| GND | 27 | INDEX |
| GND | 29 | DRV SEL N |
| GND | 31 | MOTOR ON |
| GND | 33 | HIGH DENSITY SENSE |

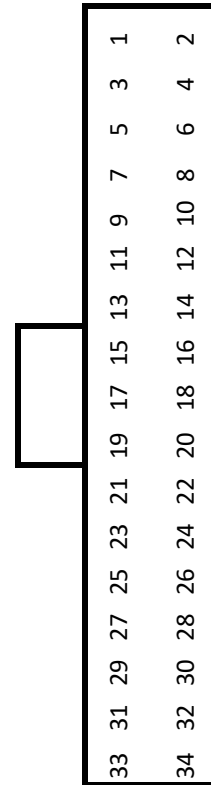

Looking into back of A100 Disk Drive

| | | |
|--------------------|----|---------|
| HIGH DENSITY SENSE | 2 | GND |
| NC | 4 | GND |
| NC | 6 | GND |
| INDEX | 8 | GND |
| DRIVE SELECT 0 | 10 | GND |
| DRIVE SELECT 1 | 12 | GND |
| NC | 14 | GND |
| MOTOR ON | 16 | GND |
| DIRECTION SELECT | 18 | GND |
| STEP | 20 | GND |
| WRITE DATA | 22 | DISK IN |
| WRITE GATE | 24 | +5V |
| TRACK 00 | 26 | +5V |
| WRITE PROTECT | 28 | +5V |
| READ DATA | 30 | NC |
| SIDE ONE SELECT | 32 | NC |
| DISK CHANGE READY | 34 | NC |



No power socket